


FOR SERIES MOTOR

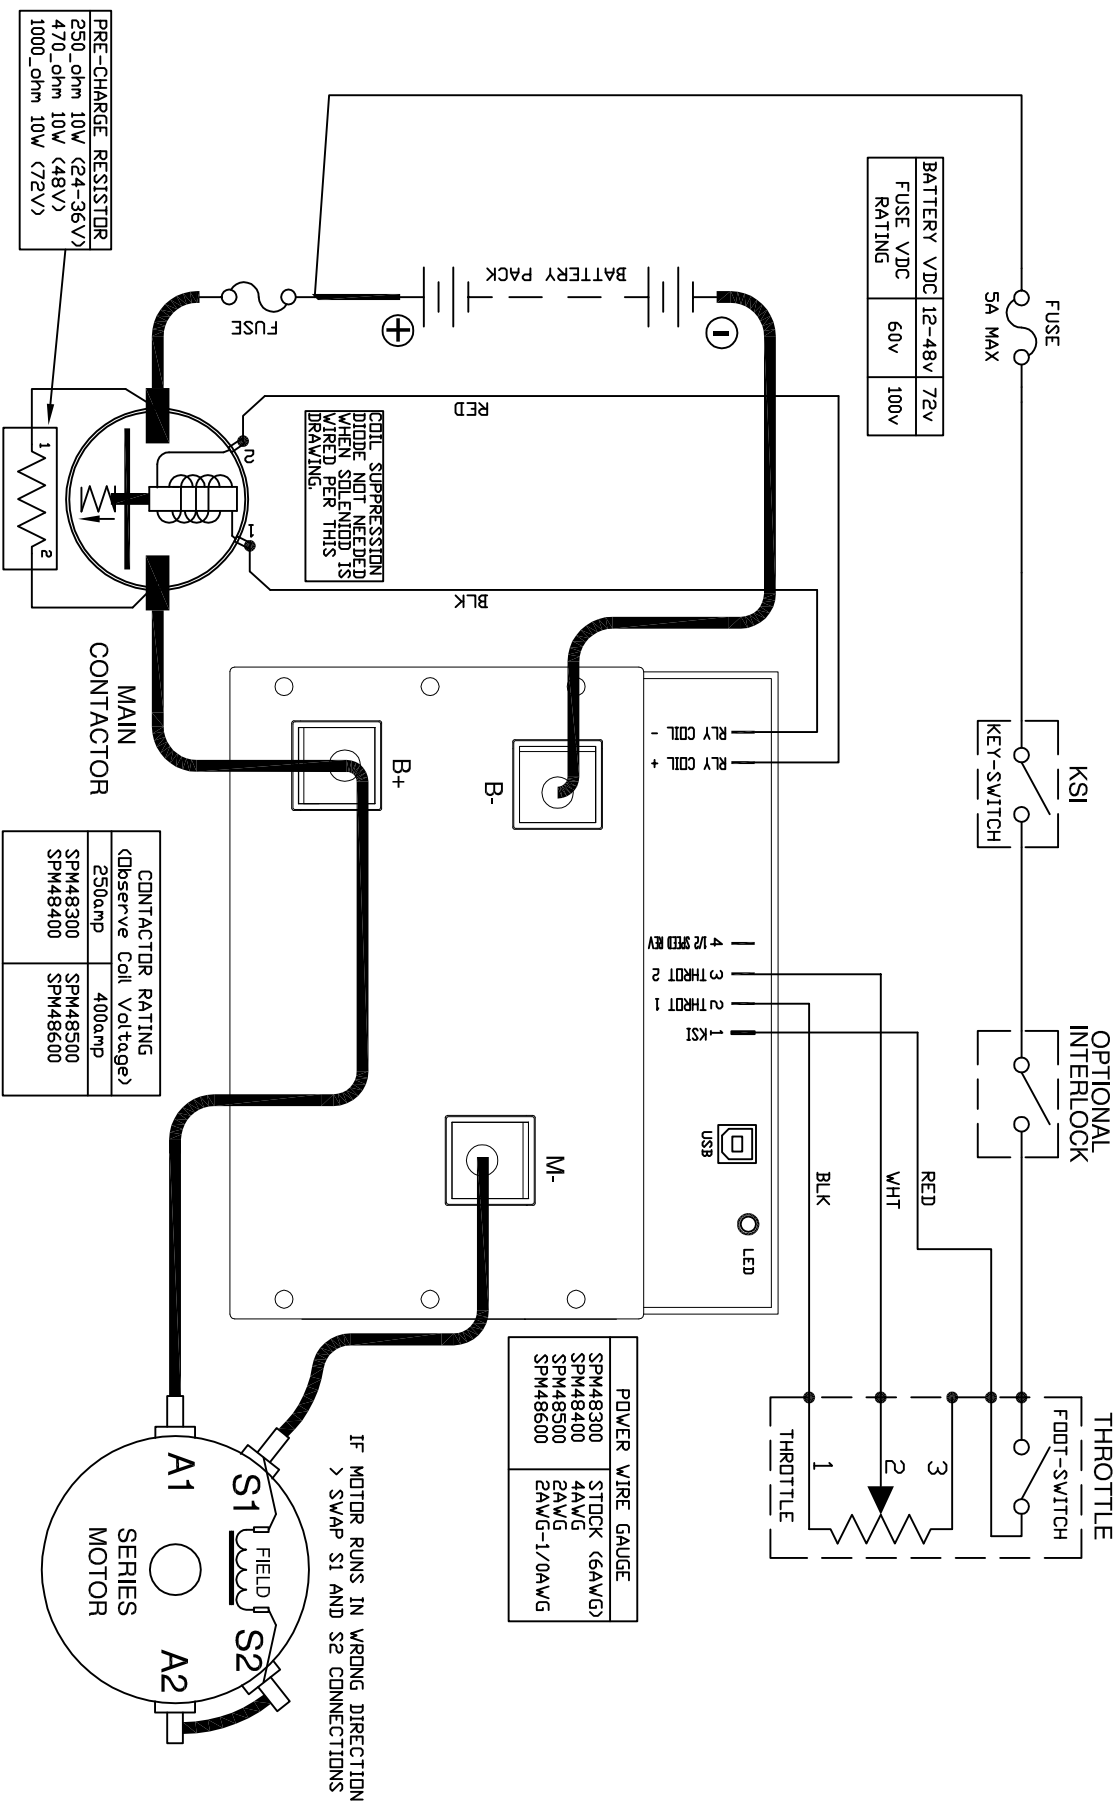

FUNCTION	TAB
KSI VOL TAGE	1
THRITTLE	2
THRITTLE	3
1/2 SPEED REVERSE	4
BATTERY POSITIVE	B+
BATTERY NEGATIVE	B-
MOTOR MINUS	M-

NOTES:

- * FLUDES REQUIRED FOR ALL INSTALLATIONS
- * DIMME REQUIRED ACROSS COILS / RELAYS
- * PRE-CHARGE RESISTOR REQUIRED
- * ASSUMES FOOTSWITCH IS OPEN WHEN THROTTLE OFF
- > ALLTRAX RESERVES THE RIGHT TO CHANGE DOCUMENTATION WITHOUT NOTICE
- > ALLTRAX MAKES NO WARRANTY AS TO THE ACCURACY, SUFFICIENCY, OR SUITABILITY OF ANY TECHNICAL OR OTHER INFORMATION PROVIDED
- > SEE OPERATORS MANUAL FOR MORE INFORMATION

REVISIONS				DWG SCALE: 1:1
REV.	ECO.	DATE	APVD	
				DRAM/RICHARD CSUK 11/15/10
				ENG/DAMON CROCKET 11/15/10
				PROPRIETARY THIS TECHNICAL DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED, REPRODUCED, RESENT, OR IN WHOLE OR PART WITHOUT WRITTEN PERMISSION OF ALTIMARK INC.

		1111 Cheney Creek Rd. Grants Pass, OR 97527 PHONE:(541) 476-3565	
TITLE			
SPM - SERIES GENERIC NO REVERSE Wiring Diagram			
SIZE	DOCUMENT NO.	REV.	
A	S DOC110-003	A	