


PART NO.	DOC110-016

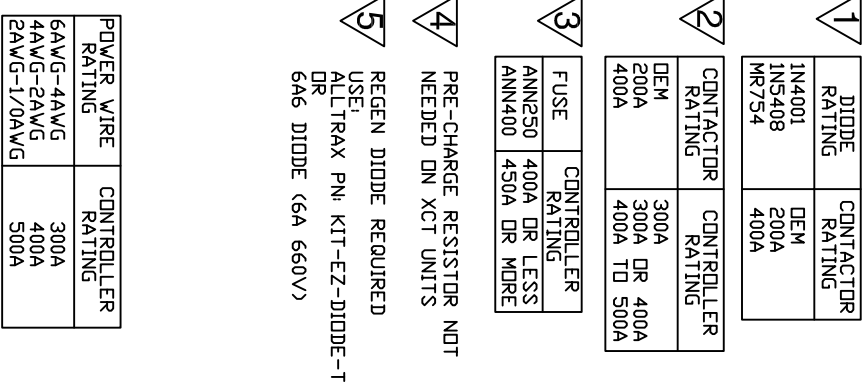

POWER WIRE RATING	CONTROLLER RATING
6AWG-4AWG	300A
4AWG-2AWG	400A
2AWG-1/0AWG	500A

PRE-CHARGE RESISTOR NOT
NEEDED ON XCT UNITS

REGEN DIODE REQUIRED
USE:
ALLTRAX PN: KIT-EZ-DIODE-T
OR
6A6 DIODE (6A 660V)

WHT

- > FUSES REQUIRED FOR ALL INSTALLATIONS
- > DTDDE REQUIRED ACROSS COILS / RELAYS
- > TDV/RUN SWITCH PREVENTS REGEN WHILE TDVING
- > ASSUMES FLODSWITCH IS OPEN WHEN THROTTLE OFF
- > ALLTRAX RESERVES THE RIGHT TO CHANGE DOCUMENTATION WITHOUT NOTICE
- > ALLTRAX MAKES NO WARRANTY AS TO THE ACCURACY, SUFFICIENCY, OR SUITABILITY OF ANY TECHNICAL OR OTHER INFORMATION PROVIDED
- > SEE OPERATORS MANUAL FOR MORE INFORMATION

REVISONS				DWG SCALE: NTS		 1111 Chaney Creek Rd. Grants Pass, OR 97527 PHONE:(541) 476-3566
REV.	ECO.	DATE	APVD	DRAWN	R CSUK	
A	120814	021615	RC	ENGR	D Crockett	
B	041315	041315	RC	111014		
C	050215	050215	RC	THIS TECHNICAL DATA IS PROPRIETARY AND TO ALLIANCE AND IS USED REPRODUCED, RELEASED OR DISCLOSED IN VIOLATION OF ALLIANCE AND ITS POLICY OF ALLIANCE AND		
				TITLE		
				XCT to E-Z-GO TXT-48 Wiring Diagram		
SIZE DOCUMENT NO.				A		
S				DOC110-016		
				REV.		C
FILE: JMWG-XCT-EZGO-TXT-48-wire-diag.dwg						SHEET 1 of 1