


SR to E-Z-GO TXT

YEAR: 1994.5 TO PRESENT -- 1206 REPLACEMENT

PART NO. DOC110-036

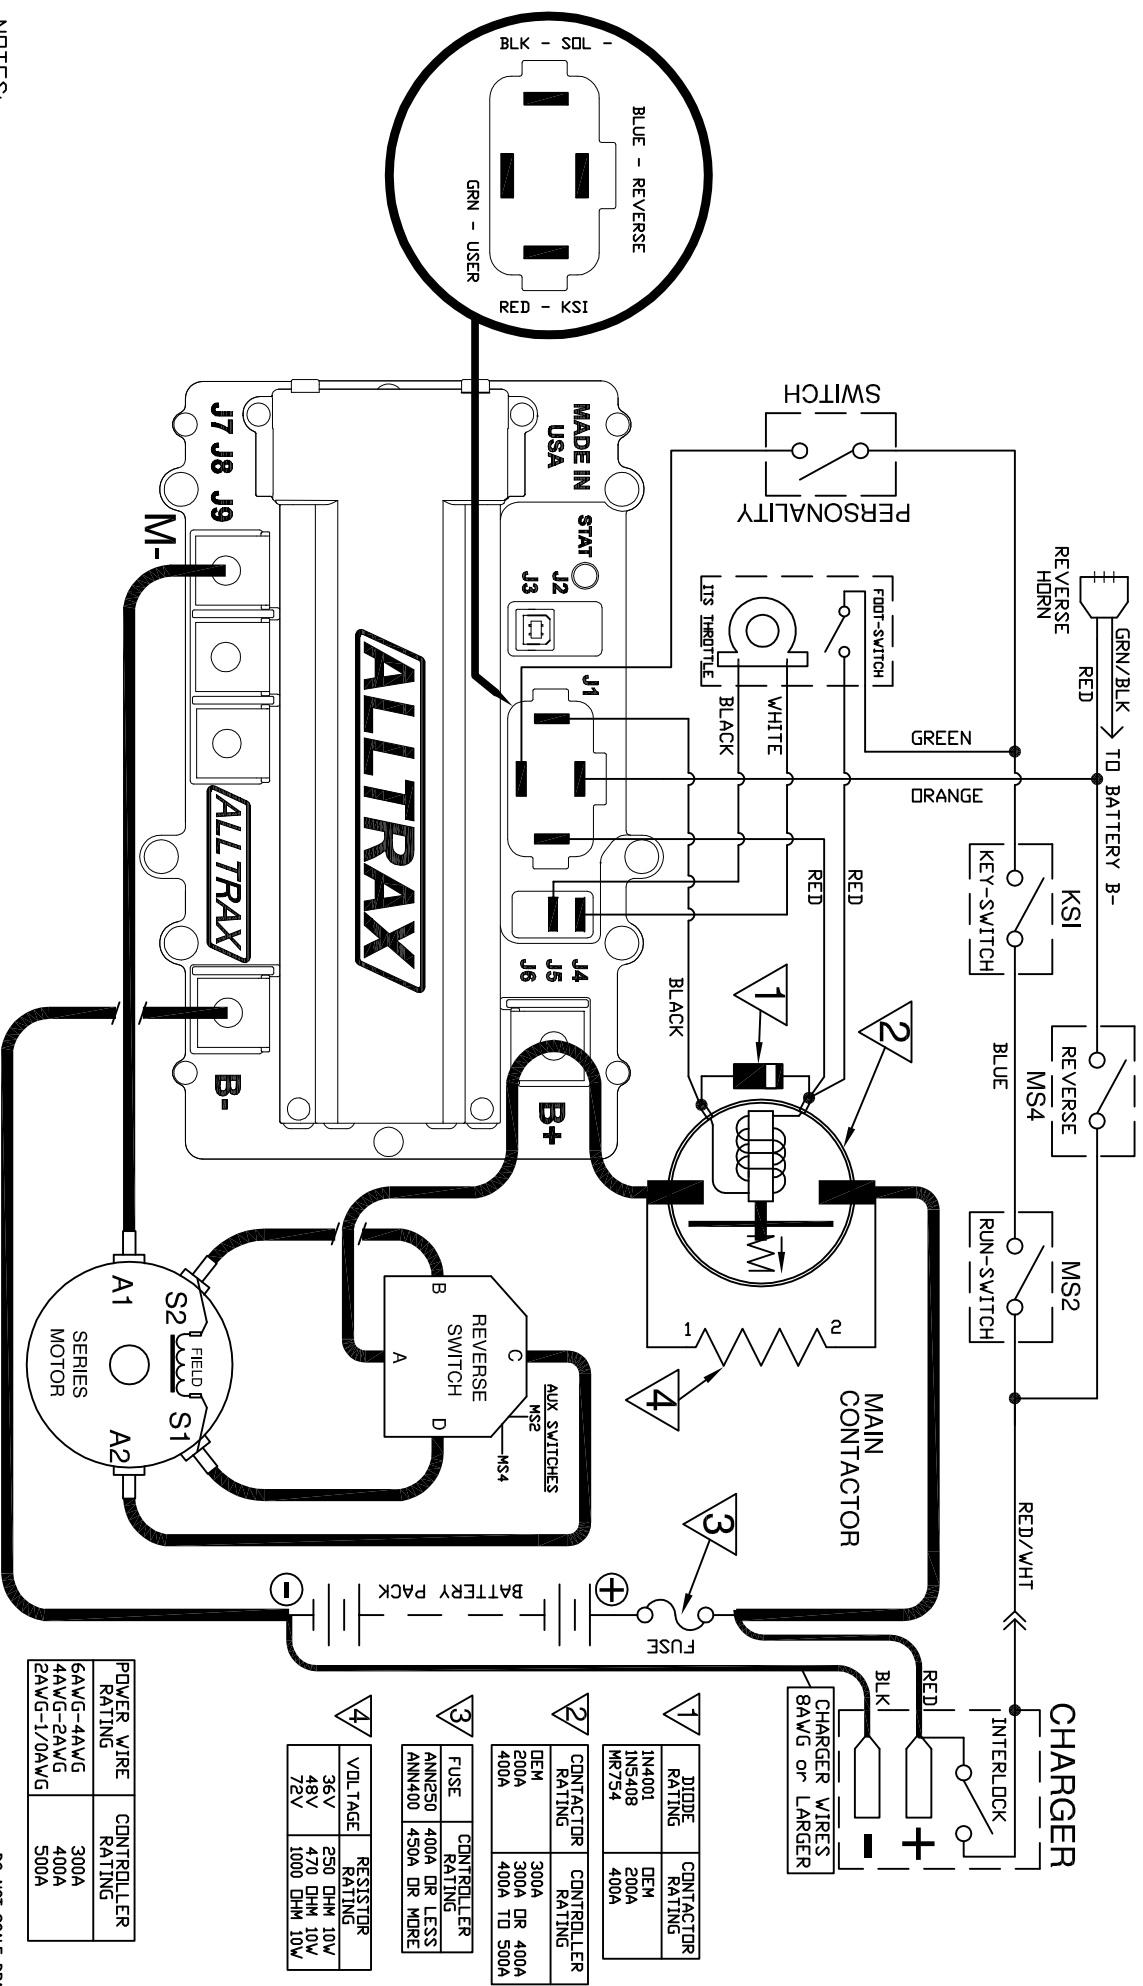

- NOTES:
- * FUSES REQUIRED FOR ALL INSTALLATIONS
 - * DIODE REQUIRED ACROSS COILS / RELAYS
 - * TOW/RUN SWITCH PREVENTS REGEN WHILE TOWING
 - > ASSUMES FOOTSWITCH IS OPEN WHEN THROTTLE OFF WITHOUT NOTICE
 - > ALLTRAX RESERVES THE RIGHT TO CHANGE DOCUMENTATION
 - > ALLTRAX MAKES NO WARRANTY AS TO THE ACCURACY, SUFFICIENCY, OR SUITABILITY OF ANY TECHNICAL OR OTHER INFORMATION PROVIDED
 - > SEE OPERATORS MANUAL FOR MORE INFORMATION

REVISIONS		DWG SCALE: NTS	
REV.	ECO.	DATE	APVD
A	033016	033016	RC

DRAWN	R CSUK	033116
ENGR	D.Crockett	033116

THIS TECHNICAL DATA IS PROPRIETARY AND IS UNCLASSIFIED. IT IS RELEASED, ON DISCREETION, IN WHOLE OR IN PART WITHOUT THE PERMISSION OF ALLTRAX INC.

DO NOT SCALE DRAWING

POWER WIRE RATING

6AWG-4AWG	300A
4AWG-2AWG	400A
2AWG-1/0AWG	500A

RESISTOR RATING

36V	250 OHM	10W
48V	470 OHM	10W
72V	1000 OHM	10W

DIODE RATING

IN4001	DEM	200A
1N5408	DEM	200A
MR754	DEM	400A

CONTACTOR RATING

DEM	200A	300A DR	400A
400A	400A	400A TD	500A

FUSE RATING

ANN250	400A	DR LESS
ANN400	450A	DR MORE

CONTROL RATING

ANN250	400A	DR LESS
ANN400	450A	DR MORE

CONTROL RATING

ANN250	400A	DR LESS
ANN400	450A	DR MORE