


BATTERY VDC	12-48v	72v
FUSE VDC RATING	60v	100v

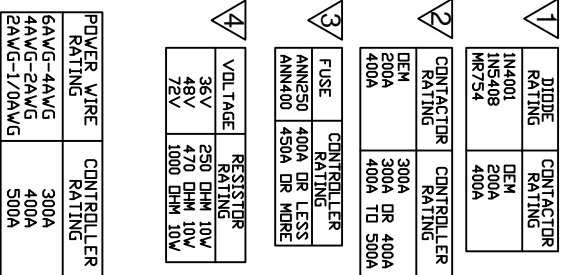

- > FUSES REQUIRED FOR ALL INSTALLATIONS
- > DTDDE REQUIRED ACROSS COILS / RELAYS
- > TDV/RUN SWITCH PREVENTS REGEN WHILE TDVING
- > ASSUMES FDOTSWITCH IS OPEN WHEN THROTTLE OFF
- > ALLTRAX RESERVES THE RIGHT TO CHANGE DOCUMENTATION WITHOUT NOTICE
- > ALLTRAX MAKES NO WARRANTY AS TO THE ACCURACY, SUFFICIENCY, OR SUITABILITY OF ANY TECHNICAL OR OTHER INFORMATION PROVIDED
- > SEE OPERATORS MANUAL FOR MORE INFORMATION

REVISIONS				DWG SCALE:	NTS
REV.	ECO.	DATE	APVD	DRAWN	R CSJK
A	033016	033016	RC		
				ENGR	D.Crockett
					033116
THIS TECHNICAL DATA IS PROPRIETARY AND IS LOANED TO YOU BY THE LENDER. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR PART WITHOUT WRITTEN PERMISSION OF ALLTRAX INC.					
 ALLTRAX 1111 Cheney Creek Rd., Grants Pass, OR 97527 PHONE:(541) 476-3566					
TITLE SR to Generic Series Reverse Wiring Diagram					
SIZE DOCUMENT NO.				REV.	
A s DCC110-039				A	
FILE: _JMWG-SR-GENERIC-SERIES-REV-WIRE-DIA SHEET 1 of 1					